

FEATURES

- Frequency Range:0.5-18GHz
- High Dynamic Range
- Compact size
- Excellent Linearity
- Precision,Reliability and Repeatability
- Economically Priced


APPLICATIONS

- Microwave Radio & VSAT
- Military & Space
- Test Instrumentation
- Frequency measurement




SPECIFICATIONS@25°C:

Part Number	Frequency Range (GHz)	TSS (dBm. Typ)	Log accuracy (±dB)Max	Dynamic Range (dBm)	Recovery Time(ns)	VSWR Max	Current@ +5/+12VDC (mA. Typ)	Case Type
MDL005185D67S	0.5-18.5	-65	2	-65~+5	38	2.5:1	200	DL4
MDL0208D60S	2-8	-60	2.5	65	50	2:01	80	DL3
MDL0618D60S	6-18	-60	2.5	65	50	2:01	80	DL3
MDL0812D60S	8-12	-60	2.5	65	50	2:01	80	DL3

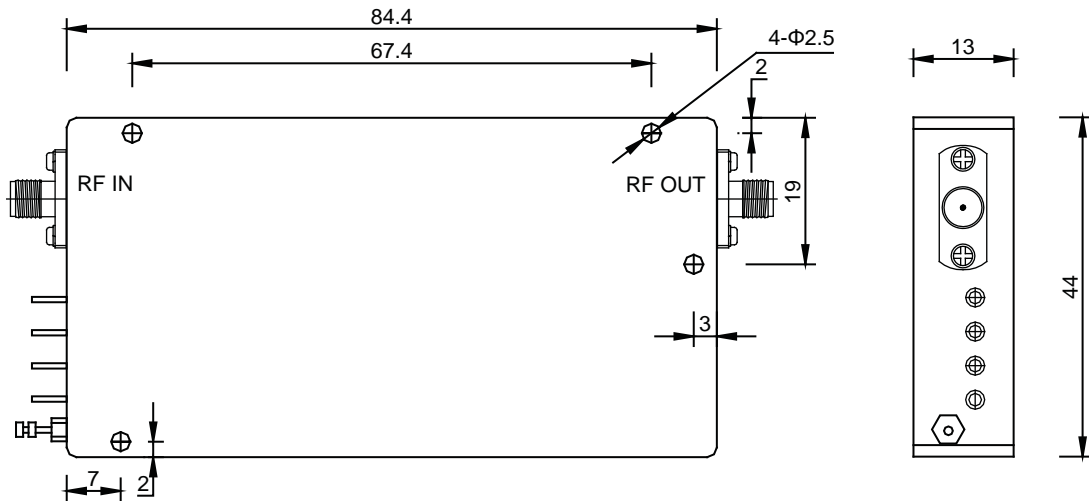

DL3

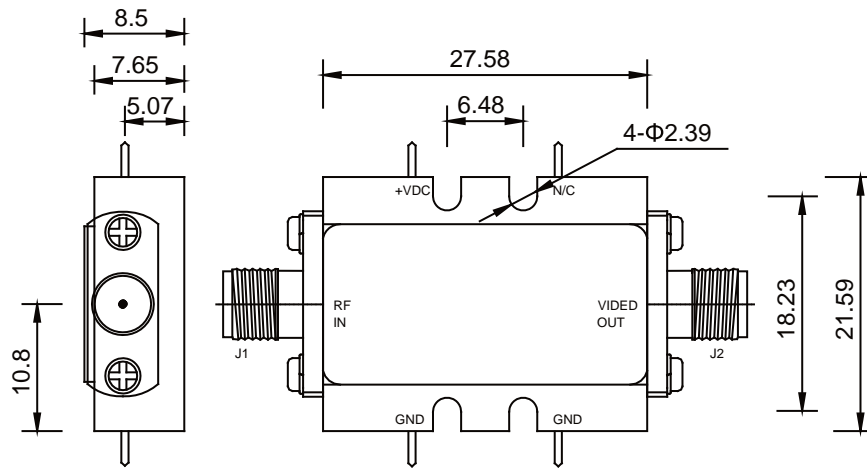

DL4